VIVOTEK

Network Camera IP7135

Quick Installation Guide

This guide describes the basic functions of IP7135. All detailed information is described in the user's manual.

⚠ Warning Before Install

Power off the Network Camera as soon as it is found smoking or smelt unusual.

⚠ Contact your distributor when such cases happen.

Keep the Network Camera away from the water. If the Network Camera is wet, power off immediately.

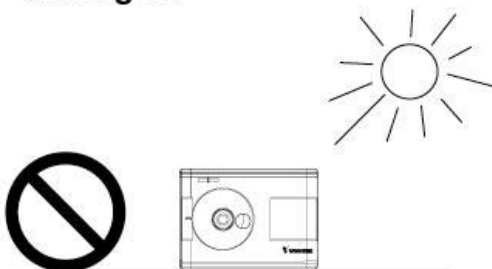⚠ Contact your distributor when such cases happen.

Do not place the Network Camera around the heat sources, such as television or oven.

Refer to your user's manual for the operating temperature.

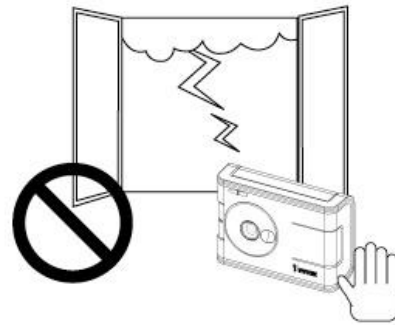**Keep the Network Camera away from the direct sunlight.**

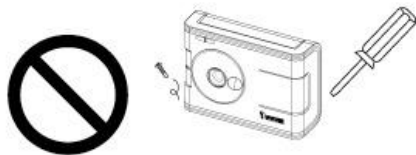**Do not place the Network Camera in high humid environments.**

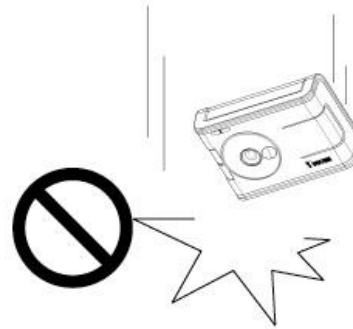⬤ Do not place the Network Camera on unsteady surfaces.

⬤ Do not touch the Network Camera when it's lightening.

⬤ Do not disassemble the Network Camera.

⬤ Do not drop the Network Camera.

⬤ Do not insert any object into the Network Camera, such as needles.

1 Check Package Contents

IP7135

Power Adapter

Camera Stand

Software CD

Quick Installation Guide

Warranty Card

2 Physical Description

● Front Panel

Status LEDs

Microphone

Lens and manual focus ring

● Rear Panel

Network Camera **VIVOTEK**

Model NO: IP7135

MAC:0002D1XXXXXX

Note the MAC address from the label on the unit.

for example: 0002D1000019=00-02-D1-00-00-19

Reset button
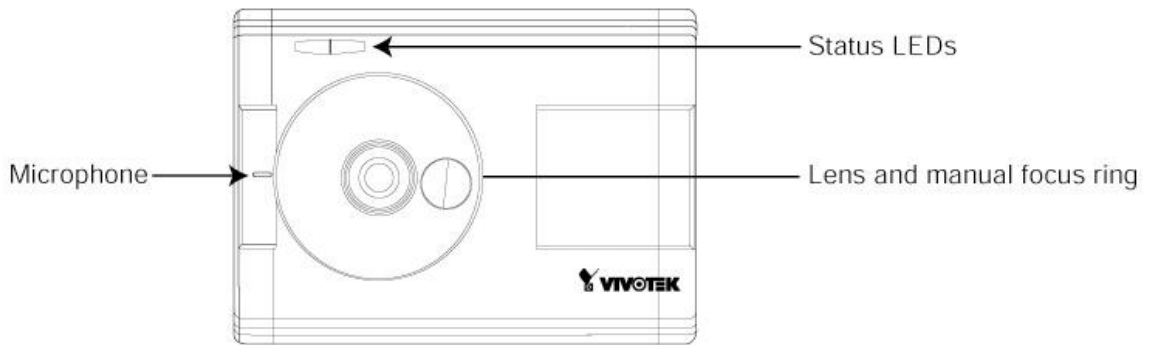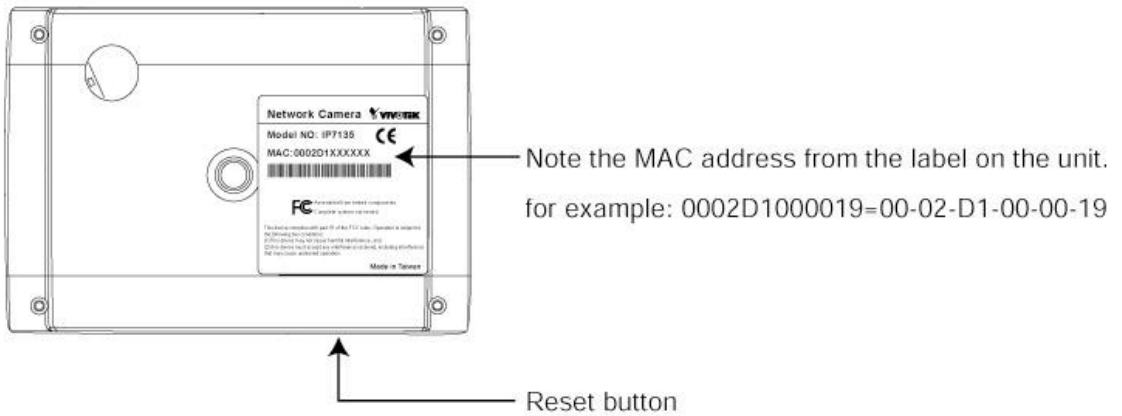
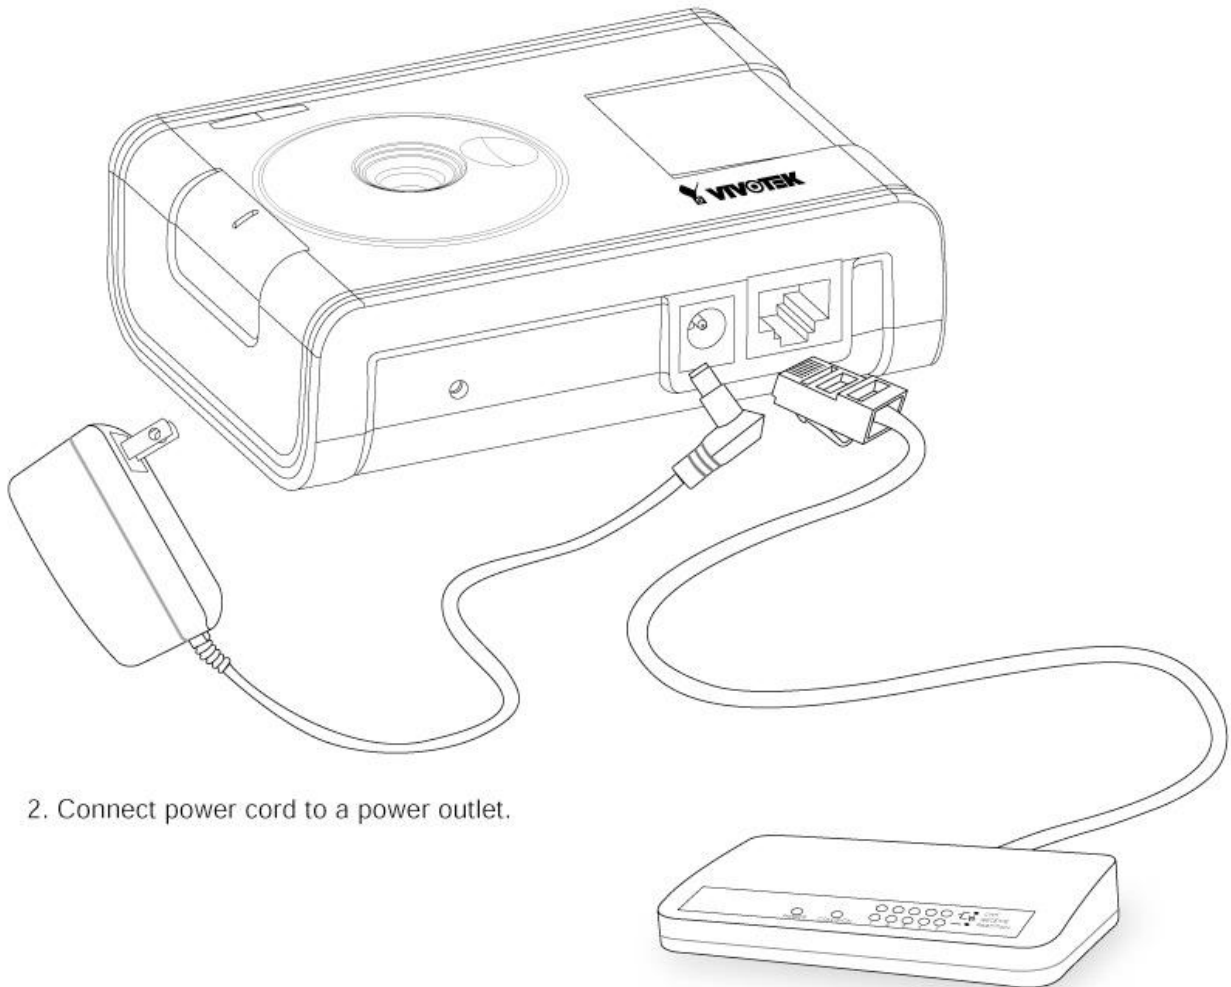## 3 Install Your Network Camera in Ethernet Network

2. Connect power cord to a power outlet.

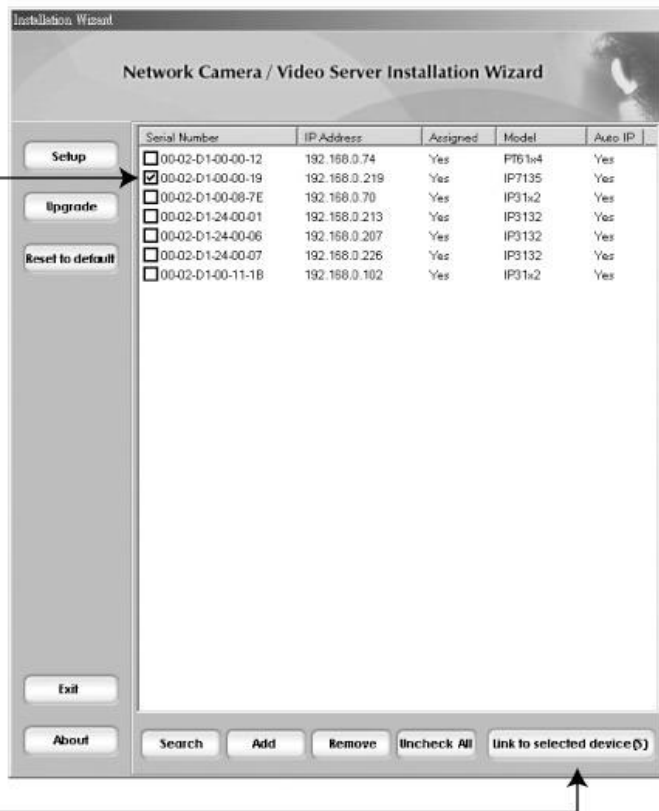1. Use Ethernet cable to make connection from Ethernet port to the hub.

✳Use Category 5 Cross Cable when the Network Camera is directly connected to PC.

4 Assign IP Address

1. Run the "Installation Wizard" under the Software Utility directory from software CD.

2. The program will search the servers or cameras on the same LAN.

Status

Searching devices, please wait!

▮▮▮▮▮▮▮▮▮▮▮▮

Installation Wizard

Network Camera / Video Server Installation Wizard

3. After searching, the main installer window will pop up. Click on serial number that matches the one you just noted from ② Physical description

	Serial Number	IP Address	Assigned	Model	Auto IP
☐	00-02-D1-00-00-12	192.168.0.74	Yes	PT61x4	Yes
☑	00-02-D1-00-00-19	192.168.0.219	Yes	IP7135	Yes
☐	00-02-D1-00-08-7E	192.168.0.70	Yes	IP31x2	Yes
☐	00-02-D1-24-00-01	192.168.0.213	Yes	IP3132	Yes
☐	00-02-D1-24-00-06	192.168.0.207	Yes	IP3132	Yes
☐	00-02-D1-24-00-07	192.168.0.226	Yes	IP3132	Yes
☐	00-02-D1-00-11-1B	192.168.0.102	Yes	IP31x2	Yes

Setup

Upgrade

Reset to default

4. Click "Link to selected device(s)" to connect the Internet Explorer to the Network Camera.

Exit

About

Search   Add   Remove   Uncheck All   Link to selected device(S)

For setup further configuration, please check user's manual on the software CD.